

腾跃系列半高敞开式冷藏立柜



产品特点

- E6 平台开发，现代外观设计
- 全景透明侧板，突出商品展示
- 挤压式风幕设计，提升产品能效
- 抽拉层板可选
- 日配和肉柜多种型号，多种选择
- 高蒸发温度 (-7°C)


客户价值

- 约 +5% 存储量
- 约 +20% 展示面积
- 约 -5% 能耗




标准型号	EU(855 宽)1300 高		EU(855 宽)1500 高		LU(1055 宽)1300 高		LU(1055 宽)1500 高		LU(1055 宽)1300/1500 高	EU(855 宽)1300/1500/1700 高
	SV EU D	SVEU M	SV EU D	SVEU M	SV LU D	SV LU M	SV LU D	SV LU M	SC LU D	SC EU D
	125/170/188/250/375		125L/170L/188L/250L/375L		125/188/210/250/375		125L/188L/210L/250L/375L		218/218L	178/178L/178N
外形尺寸 (L)	1250/1700/1875/2500/3750				1250/1875/2100/2500/3750				2180	1780
外形尺寸 (W)	855				1055				1055	880
外形尺寸 (H)	1300		1500		1300		1500		1300/1500	1300/1500/1700
工作温度 (°C)	-1~7	-1~5	-1~7	-1~5	-1~7	-1~5	-1~7	-1~5	4~12	
温度等级	3 M2	3 M1	3 M2	3 M1	3 M2	3 M1	3 M2	3 M1	3 S	
额定电压 (V)	220V									
额定频率 (Hz)	50Hz									
净重 (Kg)	148/176/186/276/364	138/176/186/276/364	150/205/210/280/420	150/205/210/280/420	180/230/251/299/449	180/230/251/299/449	210/260/290/346/519	210/260/290/346/519	260/300	204/240/270
展示面积 (m²)	1.52/1.8/1.99/2.65/3.98	1.33/1.8/1.99/2.65/3.98	1.58/2.15/2.36/3.15/4.73	1.58/2.15/2.36/3.15/4.73	1.74/2.36/2.65/3.15/4.73	1.74/2.36/2.65/3.15/4.73	1.88/2.74/3.16/3.65/5.48	1.88/2.74/3.16/3.65/5.48	3.31/3.90	1.95/2.3/2.53
有效容积 (m³)	0.49/0.54/0.6/0.8/0.19	0.49/0.54/0.6/0.8/0.19	0.51/0.69/0.76/1.01/1.52	0.51/0.69/0.76/1.01/1.52	0.5/0.74/0.83/0.99/1.49	0.5/0.74/0.83/0.99/1.49	0.62/0.93/1.04/1.24/1.85	0.62/0.93/1.04/1.24/1.85	0.61/0.720	0.64/0.75/0.83
能效等级 (EEL)	2 级		2 级		1 级		2 级		/	

命名规则

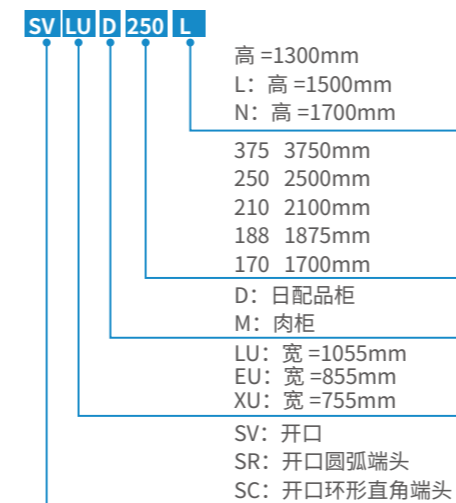

尺寸图

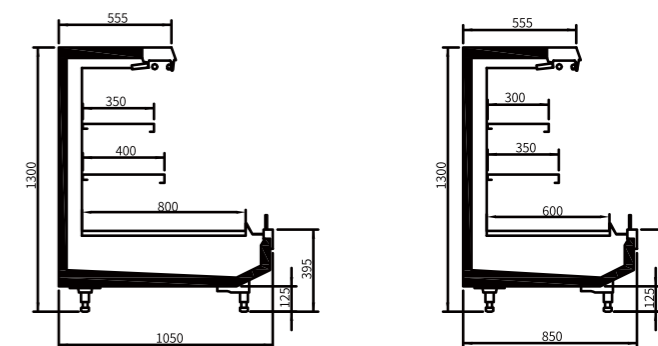

腾跃系列半高敞开式冷藏立柜