

跨越 ICF 整机组合柜



产品特点

- 独特设计，上下开启式玻璃门
- 弧面玻璃，增加商品展示
- 更高的负载线设计 (550mm, ≤ -18° C)
- 热气除霜，节能环保


客户价值

- 上下推拉门便于多顾客同时购物
- 约 +10% 存储量
- 约 +10% 展示面积
- 节能 15%
- 拉温速度快 15%
- 化霜时间 -75%




标准型号	跨越 ICF-K 整机组合柜								跨越 ICF-PV 整机组合柜							
	LD-ICF 150808K	LD-ICF 180807K	LD-ICF 220808K	LD-ICF 250808K	LD-ICF 150808K UD	LD-ICF 180807K UD	LD-ICF 220808K UD	LD-ICF 250808K UD	LD-ICF 150808 PV	LD-ICF 180807 PV	LD-ICF 220808 PV	LD-ICF 250808 PV	LD-ICF 150808 PV UD	LD-ICF 180807 PV UD	LD-ICF 220808 PV UD	LD-ICF 250808 PV UD
外形尺寸 (L)	1504	1844	2204	2504	1504	1844	2204	2504	1504	1844	2204	2504	1504	1844	2204	2504
外形尺寸 (W)	853															
外形尺寸 (H)	945	825	945	945	945	825	945	945	945	825	945	945	945	825	945	945
工作温度 (°C)	-22~-18															
温度等级	3 L1															
额定电压 (V)	220V															
额定频率 (Hz)	50Hz															
净重 (Kg)	135	138	157	190	138	141	160	193	135	138	157	190	138	141	160	193
展示面积 (m²)	0.99	1.21	1.51	1.72	0.82	1.03	1.26	1.42	0.99	1.21	1.51	1.72	0.82	1.03	1.26	1.42
有效容积 (m³)	0.390	0.450	0.620	0.720	0.390	0.450	0.620	0.720	0.390	0.450	0.620	0.720	0.390	0.450	0.620	0.720
能效等级 (EEL)	2 级				3 级				1 级							

命名规则

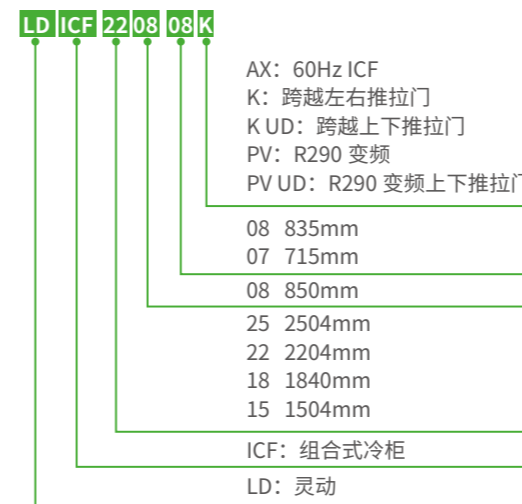

尺寸图

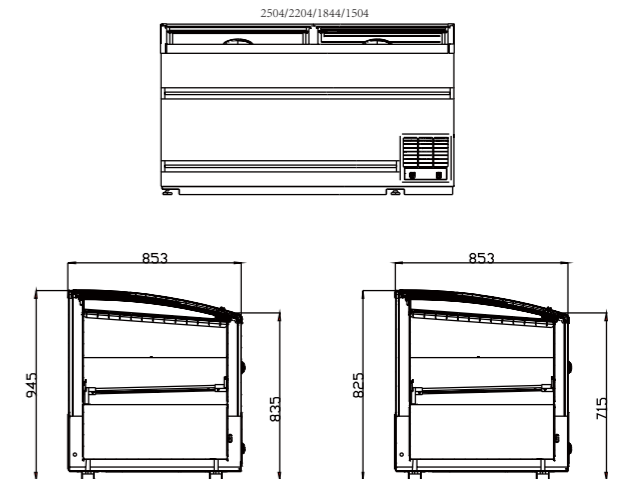

跨越 ICF 整机组合柜